


# Model 166G/169G Single Point Load Cells

## Features

- parallel bending beam
- low profile
- capacity: 1, ..., 30 kg (166G); 20, ..., 100 kg (169G)
- accuracy: 0.05 %fs
- recommended platform size: 180 X 180 mm
- aluminum construction with surface anodized (166G)  
17-4PH construction (169G)
- environment protection class: IP 65

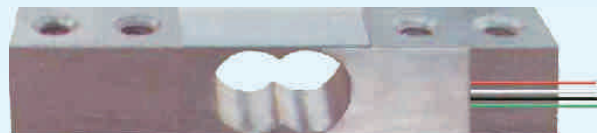

## Applications

- kitchen scales
- postage scales
- portable scales


## Description

The "single point" load cells are made of parallel bending beam working principle. Only one unit is sufficient to build up a scale. These load cells are moment insensitive. That is, when installed in a platform scale, it reads the same regardless of the position of the load applied to the upper platform.


Model 166G/169G load cells are designed to this "single point" type. 166G load cells are manufactured from high quality aluminum alloy of aviation standard, while 169G load cells are made from 17-4PH stainless steel. 166G load cells can be used to measure loads ranging from 1 kg to 100 kg with the measuring accuracy of 0.05%fs (fs = full scale).

166G/169G load cells are widely used to manufacture postage scales, kitchen scales, portable scales and other platform scales.

## Dimensions

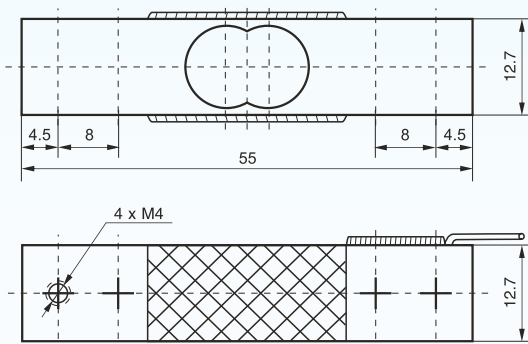

## Electrical connection

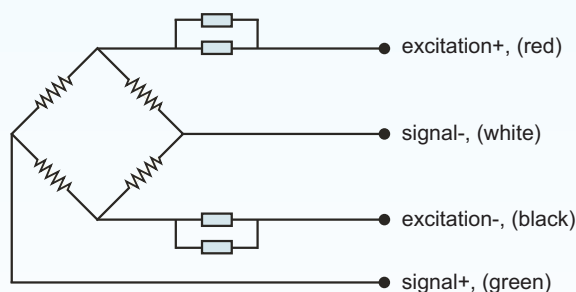

# Model 166G/169G Single Point Load Cells



## Technical Data

parameters	units	specifications	
model		166G	169G
capacity	kg	1, 2, 3, 5, 7, 10, 20, 30	20, 30, 50, 70, 100
safe load limit	%fs	150	
ultimate overload	%fs	300	200
output sensitivity at fs	mV/V	≥ 0.9 (typically 1mV/V)	≥ 1.8 (typically 2mV/V)
zero unbalance	%fso	±5	± 1.5
non-linearity	%fs	±0.05	
hysteresis	%fs	±0.05	
repeatability	%fs	±0.05	
creep error (30 min.)	%fs	±0.03	
excitation (supply voltage)	Vdc	5, ..., 10	
max. excitation voltage	Vdc	15	
input resistance	Ω	1090 ± 20	
output resistance	Ω	1000 ± 10	
insulation resistance	MΩ	≥ 2000 @50Vdc	
storage temp. range	°C	-35 ~ +80	
operating temp. range	°C	-20 ~ +60	
compensated temp. range	°C	-10 ~ +50	
temp. coefficient of ZERO	%fs/°C	0.01	
temp. coefficient of SPAN	%fs/°C	0.01	
load cell body material		aluminum alloy	17-4PH stainless steel
sealing		potted	
mechanical interface		refer to the dimensions on the datasheets	
electrical interface		4-color flying wires with PVC jacket, 0.25 m length	
environment protection		IP 65	
unit weight	g	~20	

The listed specifications are subject to change without prior notice.

**BCM SENSOR TECHNOLOGIES BVBA**

# Model 166G/169G Single Point Load Cells



## Ordering Information

<b>position (pos.) 1: model</b>																																																											
166G: made from aluminum alloy 169G: made from 17-4PH stainless steel																																																											
<b>pos. 2: capacities</b>																																																											
<table border="0"> <tr> <td><b>for 166G:</b></td> <td>1 kg</td> <td>10 kg</td> <td><b>for 169G:</b></td> <td>20 kg</td> <td colspan="5"></td> </tr> <tr> <td></td> <td>2 kg</td> <td>20 kg</td> <td></td> <td>30 kg</td> <td colspan="5"></td> </tr> <tr> <td></td> <td>3 kg</td> <td>30 kg</td> <td></td> <td>50 kg</td> <td colspan="5"></td> </tr> <tr> <td></td> <td>5 kg</td> <td></td> <td></td> <td>70 kg</td> <td colspan="5"></td> </tr> <tr> <td></td> <td>7 kg</td> <td></td> <td></td> <td>100 kg</td> <td colspan="5"></td> </tr> </table>										<b>for 166G:</b>	1 kg	10 kg	<b>for 169G:</b>	20 kg							2 kg	20 kg		30 kg							3 kg	30 kg		50 kg							5 kg			70 kg							7 kg			100 kg					
<b>for 166G:</b>	1 kg	10 kg	<b>for 169G:</b>	20 kg																																																							
	2 kg	20 kg		30 kg																																																							
	3 kg	30 kg		50 kg																																																							
	5 kg			70 kg																																																							
	7 kg			100 kg																																																							
<b>pos. 3: output sensitivity</b>																																																											
1 mV/V (for 166G) 2 mV/V (for 169G)																																																											
<b>pos. 4: non-linearity or accuracy class</b>																																																											
0.05 %fs																																																											
<b>pos. 5: bridge resistance</b>																																																											
1000 Ω (Rin = 1090±20 Ω, Rout = 1000±20 Ω)																																																											
<b>pos. 6: threads (live end/fixed end)</b>																																																											
2xM4/2xM4 : two M4 threads at the live end, two M4 threads at the fixed end																																																											
<b>pos. 7: electrical interface</b>																																																											
4FW/PVC/0.25: 4-color flying wires with PVC jacket, 0.25* m length																																																											
<b>pos. 8: environment protection</b>																																																											
IP 65																																																											
<b>pos. 9: accessories for installation</b>																																																											
NA**. In case of "NA", pos.9 can be omitted.																																																											
<b>pos. 10: customized spec's</b>																																																											
<p>When any customized spec's are required, the customer needs to add "C" as the last parameter in the ordering code, and specifies the wished spec's on his order clearly.</p> <p>The customized spec's needs to be confirmed in advance by BCM's sales representative.</p> <p>Code "C" can be omitted if no customized spec's are required.</p>																																																											
<b>pos.1</b>	<b>pos. 2</b>	<b>pos. 3</b>	<b>pos. 4</b>	<b>pos. 5</b>	<b>pos. 6</b>	<b>pos. 7</b>	<b>pos. 8</b>	<b>pos. 9</b>	<b>pos. 10</b>																																																		

\*: This value can also be a customized value.

\*\* : NA = not available or not applicable

**example:** 169G-50kg-2mV/V-0.05%fs-1000Ω-2xM4/2xM4-4FW/PVC/0.25-IP65-C

**BCM SENSOR TECHNOLOGIES BVBA**

